

TTS Metric Grommets, TPE




Material TPE - Thermoplastic Elastomer - UL approved material
Mode of protection IP67
Temperature range -50°C...+125°C
Test standard IEC 60529, IP67
Semko report M16 - 708555-1
M20 - 708555-2
M25 - 708555-3
M32 - 708555-4

Halogen-Free

Suitable for holes in material of 0,5 - 4,5 mm thickness.

- Quick and simple assembly without the use of tools
- Handles exceptionally large cable span
- An end-plug for all applications

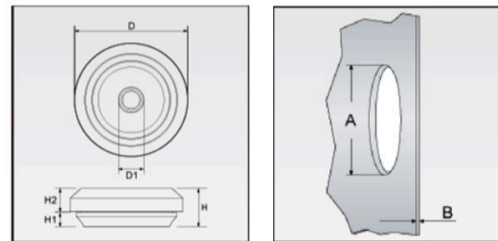

Purchase number	Size	For cable / pipe Ø mm	A mm	B mm	D* mm	D1 mm	H mm	H1 mm	H2* mm	Pcs pack
Light grey RAL 7035										
14445711	M16	5 - 10	16,5	0,5 - 3	23,5	4	11	4	6,75	50
14445712	M20	6 - 13	20,5	0,5 - 3	27,5	5	11	4	6,75	50
14445713	M25	8 - 17	25,5	0,5 - 3,5	32,5	7	11	4	6,75	50
14445714	M32	12 - 24	32,5	0,5 - 4,5	39,5	11	11	4	6,75	25
Black RAL 9005										
14445716	M16	5 - 10	16,5	0,5 - 3	23,5	4	11	4	6,75	50
14445717	M20	6 - 13	20,5	0,5 - 3	27,5	5	11	4	6,75	50
14445718	M25	8 - 17	25,5	0,5 - 3,5	32,5	7	11	4	6,75	50
14445719	M32	12 - 24	32,5	0,5 - 4,5	39,5	11	11	4	6,75	25
White RAL 9010										
14445721	M16	5 - 10	16,5	0,5 - 3	23,5	4	11	4	6,75	50
14445722	M20	6 - 13	20,5	0,5 - 3	27,5	5	11	4	6,75	50
14445723	M25	8 - 17	25,5	0,5 - 3,5	32,5	7	11	4	6,75	50
14445724	M32	12 - 24	32,5	0,5 - 4,5	39,5	11	11	4	6,75	25
Other colours										
On request	M16	5 - 10	16,5	0,5 - 3	23,5	4	11	4	6,75	50
On request	M20	6 - 13	20,5	0,5 - 3	27,5	5	11	4	6,75	50
On request	M25	8 - 17	25,5	0,5 - 3,5	32,5	7	11	4	6,75	50
On request	M32	12 - 24	32,5	0,5 - 4,5	39,5	11	11	4	6,75	25

*Varies depending on the thickness of material installed in.