


Series AST223

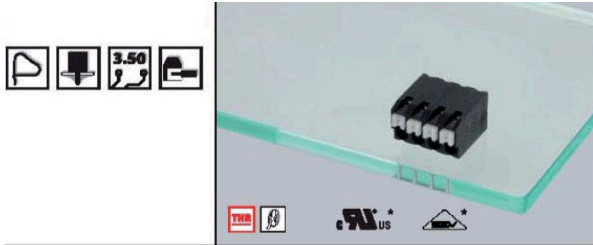


AST223

Spring clamp terminal block, solderable, centerline 3.5 mm / 0.138 inches, horizontal wire entry, double solder pins

Technical Data

0.25 - 1.5 mm ² 130 V / 1.5 kV / 12 A	
Insulation co-ordination according to EN 60664-1	
Clearance and creepage distances	min. 1.9 mm
Insulating material class	CTI 600
Overvoltage category	III III II
Pollution degree	3 2 2
Rated voltage	125 320 320
Rated test voltage	1.5 4 2.5
Protection category according to IEC 529	IP20
Min. insul. strip length	8.5 mm
Solder pin dimension	0.4 x 0.8 mm
Recommended pc board hole dia.	Ø 1.1 mm
Solder pin length	1.5 mm
Pole size	2 - 12
Color	black

Dimensions in mm 1 mm = 0.0394 in.



L – (pole size - 1) x centerline + 3.5 mm / 0.138 inches

Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

AST223

centerline 3.5 mm / 0.138 inches

P/N AST223

	02	03	04	05	06	07	08
	09	10	11	12			

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.