


Series AST055

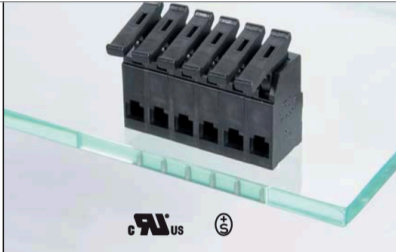

AST055

Spring clamp terminal block, solderable, centerline
5 mm / 0.197 inches, horizontal wire entry

Technical Data

V / A / AWG 300 / 15 / 28 - 12


0.08 - 2.5 mm² 250 V / 4 kV / 20 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances	min. 4 mm		
Insulating material class	CTI 600		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	320	800	800
Rated test voltage	4	6	4

Protection category according to IEC 529	IP20
Min. insul. strip length	6 mm
Solder pin dimension	1.0 x 0.8 mm
Recommended pc board hole dia.	Ø 1.4 mm
Solder pin length	3.6 mm
Pole size	2 - 24
Color	black

Dimensions in mm 1 mm = 0.0394 in.

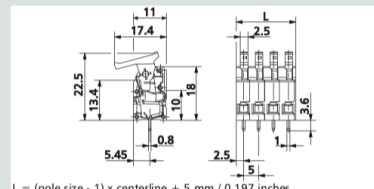

L = (pole size - 1) x centerline + 5 mm / 0.197 inches

Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

AST055

centerline 5 mm / 0.197 inches

P/N AST055

	02	03	04	05	06	07	08
	09	10	11	12	13	14	15
	17	18	19	20	21	22	23
							24

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.