


# Series AST225

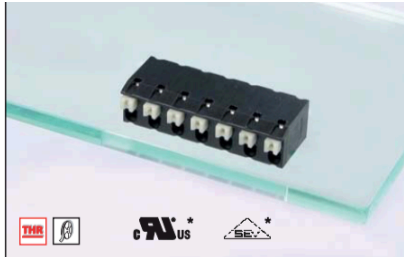

30

## AST225

Spring clamp terminal block, solderable, centerline 5 mm / 0.197 inches, horizontal wire entry, double solder pins

### Technical Data

0.25 - 1.5 mm<sup>2</sup> 250 V / 4 kV / 12 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 3.4 mm

Insulating material class CTI 600

Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250	630	630
Rated test voltage	2.5	6	4

Protection category according to IEC 529 IP20

Min. insul. strip length 8.5 mm

Solder pin dimension 0.4 x 0.8 mm


Recommended pc board hole dia. Ø 1.1 mm

Solder pin length 1.5 mm

Pole size 2 - 8

Color black

Dimensions in mm 1 mm = 0.0394 in.

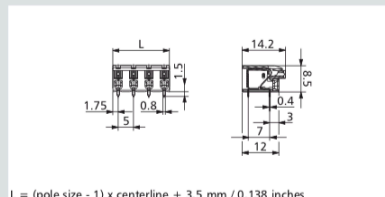

### Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

AST225 centerline 5 mm / 0.197 inches

	02	03	04	05	06	07	08
P/N AST225							

\* approval pending

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.