


Series AST215

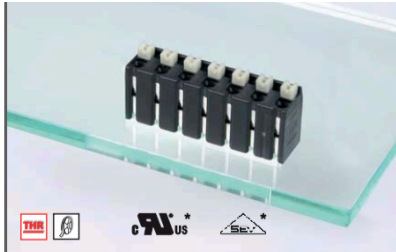

34


AST215

Spring clamp terminal block, solderable, centerline 5 mm / 0.197 inches, vertical wire entry, double solder pins

Technical Data

0.25 - 1.5 mm ² 250 V / 4 kV / 12 A	
Insulation co-ordination according to EN 60664-1	
Clearance and creepage distances	min. 3.4 mm
Insulating material class	CTI 600
Overtoltage category	III III II
Pollution degree	3 2 2
Rated voltage	250 630 630
Rated test voltage	2.5 6 4
Protection category according to IEC 529	
	IP20
Min. insul. strip length	8.5 mm
Solder pin dimension	0.4 x 0.8 mm
Recommended pc board hole dia.	Ø 1.2 mm
Solder pin length	3.5 mm
Pole size	2 - 12
Color	black

Dimensions in mm 1 mm = 0.0394 in.

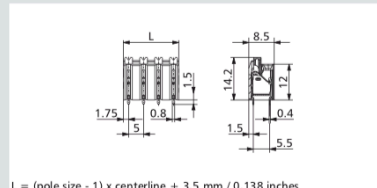

$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 \text{ mm} / 0.138 \text{ inches}$

Part numbers (P/N) (information: page 16)

Complete the part number by adding the pole size.

AST215		02	03	04	05	06	07	08
centerline 5 mm / 0.197 inches								
P/N AST215	<input type="text"/>							

* approval pending

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.