


# Series ASP025

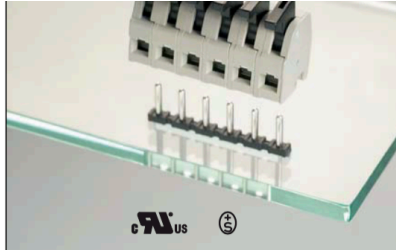

## Headers

to ASP025

- Type 017** page 126
- Type 039** page 136
- Type 041** page 129
- Type 417** page 128

## Headers

to ASP145

- Type 017** page 126
- Type 027** page 126
- Type 041** page 129
- Type 046** page 127
- Type 318** page 128
- Type 417** page 128

## Accessories

to ASP025

- Mounting flange**  
720036 page 201

## ASP025

Spring clamp terminal block, pluggable, centerline  
5 mm / 0.197 inches, wire entry perpendicular to plug  
direction

### Technical Data

V / A / AWG 300 / 8 / 28 - 16

0.08 - 1 mm<sup>2</sup> 250 V / 4 kV / 10 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 3.7 mm

Insulating material class CTI 400

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 250 500 500

Rated test voltage 2.5 4 2.5

Protection category according to IEC 529


IP20

Min. insul. strip length 4 mm

Pole size 2 - 24

Color grey

Dimensions in mm 1 mm = 0.0394 in.

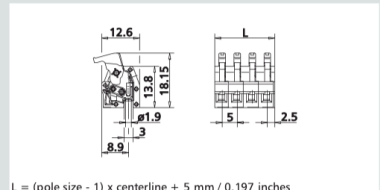

### Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

ASP025

centerline 5 mm / 0.197 inches

P/N ASP025

	02	03	04	05	06	07	08
	09	10	11	12	13	14	15
	17	18	19	20	21	22	23

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.