


Series ASM01W

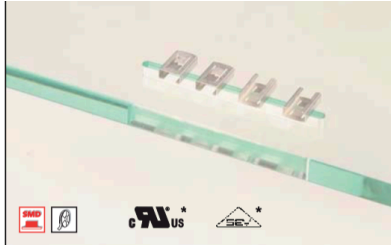


ASM01W0164

SMT solderable spring contact, mounting on component or on soldering side for direct insertion of components with pins or with contacts.

Technical Data

0.1 - 0.75 mm² 750 V / 4 kV / 13 A
Insulation co-ordination according to EN 60664-1
Protection category according to IEC 529 IP00
Min. insul. strip length 8 mm
Recommended pc board hole dia. Ø 2 mm

Dimensions in mm 1 mm = 0.0394 in.

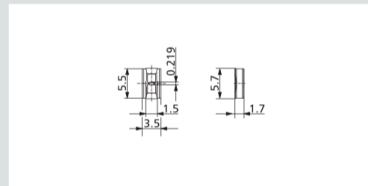

Part numbers (P/N) (information: page 16)

ASM01W0164	
P/N ASM01W0164-0G16	15" Reel Mounting soldering side
P/N ASM01W0164-1G16	15" Reel Mounting component side
P/N ASM01W0164-2G16	7" Reel Mounting soldering side
P/N ASM01W0164-3G16	7" Reel Mounting component side
P/N ASM01W0164-4G16	13" Reel Mounting soldering side
P/N ASM01W0164-5G16	13" Reel Mounting component side

* approval pending

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.