


Series ASP043

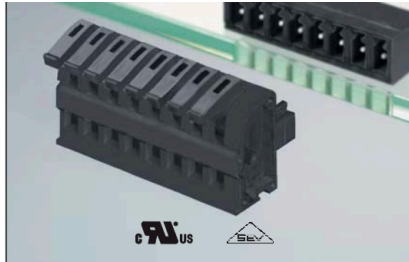

44

Headers

to ASP043

- Type 188 page 121
- Type 189 page 119
- Type 342 page 120
- Type 343 page 118


ASP043

Spring clamp terminal block, pluggable, centerline 3.5 mm / 0.138 inches, wire entry parallel to plug direction

Technical Data

300 V / A / AWG	300 / 8 / 28 - 16
0.08 - 1.5 mm ²	130 V / 2.5 kV / 10 A
Insulation co-ordination according to EN 60664-1	
Clearance and creepage distances	min. 2.3 mm
Insulating material class	CTI 400
Overvoltage category	III III II
Pollution degree	3 2 2
Rated voltage	160 320 320
Rated test voltage	2.5 4 2.5
Protection category according to IEC 529	
Min. insul. strip length	6 mm
Pole size	2 - 12
Color	black

Dimensions in mm 1 mm = 0.0394 in.

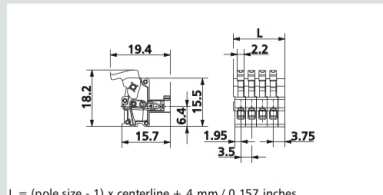

Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

ASP043

centerline 3.5 mm / 0.138 inches

P/N ASP043

<input type="checkbox"/>	02	03	04	05	06	07	08
<input type="checkbox"/>	09	10	11	12			
<input type="checkbox"/>							

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.