


Series ASP145

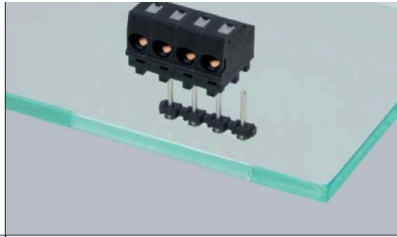

Headers

to ASP025

- Type 017** page 126
- Type 039** page 136
- Type 041** page 129
- Type 417** page 128

Headers

to ASP145

- Type 017** page 126
- Type 027** page 126
- Type 041** page 129
- Type 046** page 127
- Type 318** page 128
- Type 417** page 128

Accessories

to ASP025

- Mounting flange**
720036 page 201

ASP145

Spring clamp terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry perpendicular or parallel to plug direction, 3 plugging directions

Technical Data

0.2 - 1.5 mm² 250 V / 2.5 kV / 12 A


Insulation co-ordination according to EN 60664-1

| | | | |
|----------------------------------|-------------|-----|-----|
| Clearance and creepage distances | min. 3.2 mm | | |
| Insulating material class | CTI 600 | | |
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Rated voltage | 250 | 630 | 630 |
| Rated test voltage | 2.5 | 6 | 4 |

Protection category according to IEC 529

| | |
|--------------------------|--------|
| Min. insul. strip length | 7 mm |
| Pole size | 2 - 12 |
| Color | black |

Dimensions in mm 1 mm = 0.0394 in.

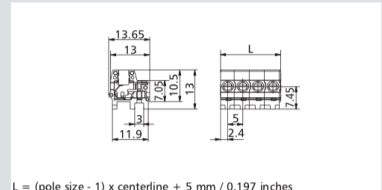

Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

ASP145

centerline 5 mm / 0.197 inches

P/N ASP145

| | | | | | | | |
|--|----|----|----|----|----|----|----|
| | 02 | 03 | 04 | 05 | 06 | 07 | 08 |
| | 09 | 10 | 11 | 12 | | | |

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.