







Series ASP155

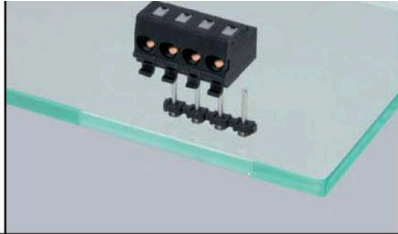

48

Headers

to ASP155

-  **Type 017** page 126
-  **Type 027** page 126
-  **Type 046** page 127
-  **Type 318** page 128
-  **Type 417** page 128

ASP155


Spring clamp terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry perpendicular or parallel to plug direction, 3 plugging directions, clip system for mounting into a housing

Technical Data

0.2 - 1.5 mm² 250 V / 2.5 kV / 12 A

Insulation co-ordination according to EN 60664-1
 Clearance and creepage distances min. 3.2 mm
 Insulating material class CTI 600
 Overvoltage category III III II
 Pollution degree 3 2 2
 Rated voltage 250 630 630
 Rated test voltage 2.5 6 4
 Protection category according to IEC 529 IP20
 Min. insul. strip length 7 mm
 Pole size 2 - 12
 Color black

Dimensions in mm 1 mm = 0.0394 in.

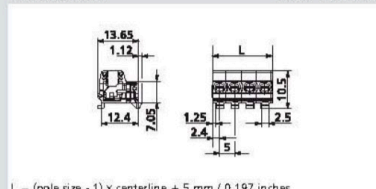

L = (pole size - 1) x centerline + 5 mm / 0.197 inches

Part numbers (P/N) (information: page 16)

Complete the part number by adding the pole size.

ASP155 centerline 5 mm / 0.197 inches

	02	03	04	05	06	07	08
P/N ASP155	09	10	11	12			

-  Standard pole sizes
-  Available on demand. Minimum order quantity 5000 pieces per item.

Get in contact with our team in The Netherlands or Belgium

The Netherlands

Freddy van Riemsdijkweg 7
5657 EE Eindhoven

+31 (0)40 20 88 088
sales@avt-connecting.com
www.avt-connecting.com

Belgium

Grauwmeer 1/45 Bus 43
B-3001 Heverlee

+32 (0)16 400 500
sales@avt-connecting.be
www.avt-connecting.com

