


# Series ASP045

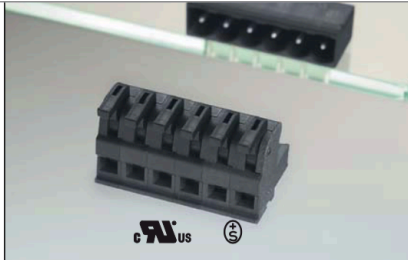

## Headers

to ASP045

- Type 176** page 140
- Type 177** page 133
- Type 270** page 134
- Type 274** page 134
- Type 276** page 141
- Type 278** page 135
- Type 280** page 141
- Type 319** page 131
- Type 320** page 132
- Type 329** page 138
- Type 330** page 139

## Accessories

for ASP045 (only in combination with headers type 176, 177, 319, 320, 329 and 330)  
**coding set**  
700025 page 206


## ASP045

Spring clamp terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry parallel to plug direction

### Technical Data

	V / A / AWG	300 / 8 / 28 - 16
	0.08 - 1 mm <sup>2</sup>	250 V / 4 kV / 10 A
Insulation co-ordination according to EN 60664-1		
Clearance and creepage distances	min. 4 mm	
Insulating material class	CTI 400	
Overvoltage category	III	III II
Pollution degree	3	2 2
Rated voltage	250	500 500
Rated test voltage	2.5	4 2.5
Protection category according to IEC 529	IP20	
Min. insul. strip length	4 mm	
Pole size	2 - 24	
Color	black	

Dimensions in mm 1 mm = 0.0394 in.

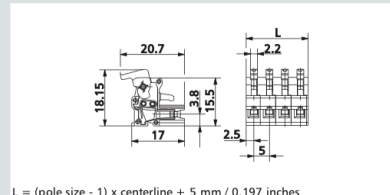

### Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

#### ASP045

centerline 5 mm / 0.197 inches

P/N ASP045	<input type="text"/>	02	03	04	05	06	07	08	
		09	10	11	12	13	14	15	16
		17	18	19	20	21	22	23	24

#### ASP049

centerline 10 mm / 0.394 inches

P/N ASP049	<input type="text"/>	02	03	04	05	06	07	08
		09	10	11	12			

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.