

Cable tie BELTO® with flat head



BELTO®

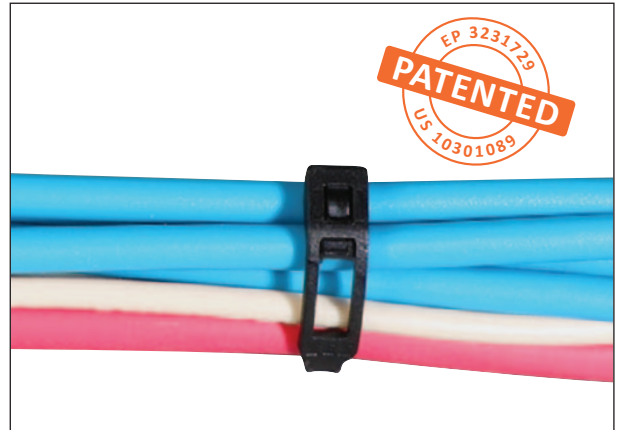


BELTO®





New

Material:	PA 6.6	PA 6.6 HT
Colour:	black - natural	black
Operating temperature:	-40 to +85°C +150°C short-term	-40 to +110°C +180°C short-term
Serrations:		external
Flame resistance:		V2 UL94
Specifications:		halogen free EN 45545-2





Application: Its flat, patented fixing head is suitable for any application where the space requirement of cable harnesses must be reduced. It integrates perfectly into the volume of the wiring harness. These cable ties are equipped with a pre-assembly system allowing closing and re-opening until final tightening. No risk of damage to cables, installations and users.



• BELTO®

type	article number		dimensions length x width mm	maxi. bundle Ø mm	tensile strength daN	 pces
	natural	black				
BELTO® 100/25	0122 1100 018	0122 1100 010	100 x 2,5	21	8	100 
BELTO® 150/25	0122 1150 018	0122 1150 010	150 x 2,5	38	8	100 
BELTO® 200/25	0122 1200 018	0122 1200 010	200 x 2,5	50	8	100 

• BELTO® HT (for high temperatures)

type	article number	dimensions length x width mm	maxi. bundle Ø mm	tensile strength daN	 pces
BELTO® HT 100/25	0122 2100 010	100 x 2,5	21	8	100 
BELTO® HT 150/25	0122 2150 010	150 x 2,5	38	8	100 
BELTO® HT 200/25	0122 2200 010	200 x 2,5	50	8	100 



 Bag available with a European suspension hole.

 C16/1-01



Operating
instruction
in video

