


GROMMETS DG-TPE, PERFORATED MEMBRANE

Grommets, cable entry, with notched PG membrane, made of TPE

Material	TPE
Temperature	-50 to 125°C
Colour	Black
Halogen-free	True
Resistance to ageing	Very good
Resistance to organic solvents	Reasonably good
Resistance to oils	Reasonably good
Resistance to ozone	Good
Resistance to fuels	Mediocre
Standard grommets	(Notched) membrane

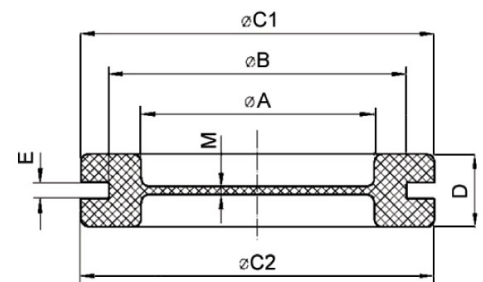

Partnumber	Cable diameter mm	Panel hole mm	Panel thickness mm	A	C mm	C2	D	M
14402111	4.5	18	2	11	22.5	21.5	7	1
14402121	18	28	2	21	34.5	34.5	8	1
14402122	20	28	2	21	34.5	34.5	8	1
14402116	10	22	2	16	27.5	26	7.4	1

AVT Industrial Components BV, Givatec BVBA and AGCO BV are part of AVT Wiring & Connecting

AVT Industrial Components BV
+31 (0)40 20 88 088
sales@avtic.com
www.avtic.com

Givatec BVBA
+32 (0)16 400 500
sales@givatec.com
www.givatec.com

AGCO BV
+31 (0)40 208 80 044
sales@agco.nl
www.agco.nl