


# CORRUGATED UW-LPDE CABLE PROTECTION CONDUITS

Corrugated UW-LPDE cable protection conduits

Conduits & tubings	Cable conduits
Material	Polyethylene
Temperature	-40 to 90°C
Technical characteristics	Cadmium-free Chemical-resistant Halogen-free
Norms	UL 94 HB
Colour	Black

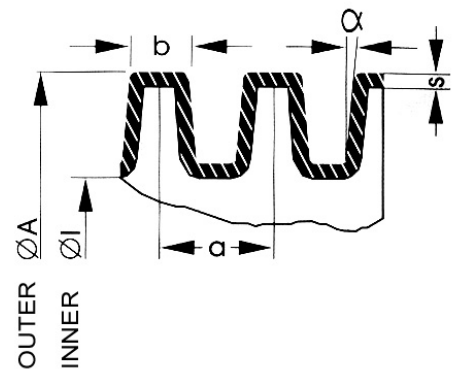

Partnumber	Inner diameter	Outer Ø	A	B
18600690	29	34.3	3.4	2.3
18600691	36	42.4	4.2	2.8
18600685	9.9	13	2.7	1.8
18600694	91.5	106	8.6	5.1
18600693	67.5	80	8.6	5.1
18600692	47.7	54.5	4.3	2.8
18600686	12.2	15.7	3.1	2.2
18600684	6.8	9.9	3.1	2.2

Partnumber	Inner diameter	Outer Ø	A	B
18600689	23.2	28.3	3.4	2.3
18600688	23.2	28.3	3.4	2.3
18600687	16.6	21.2	3.3	2.3

AVT Industrial Components BV, Givatec BVBA and AGCO BV are part of AVT Wiring & Connecting

AVT Industrial Components BV

+31 (0)40 20 88 088

sales@avtic.com

www.avtic.com

Givatec BVBA

+32 (0)16 400 500

sales@givatec.com

www.givatec.com

AGCO BV

+31 (0)40 208 80 044

sales@agco.nl

www.agco.nl

