
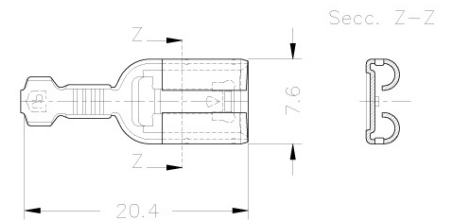


# RECEPTACLES 6.3 (.250) SERIES, STRAIGHT TYPE, STANDARD SELF-LOCKING, MANUEL DISCONNECTION

Receptacles 6.3 (.250) series, straight type, standard self-locking, manuel disconnection

Terminal version	On reel
Terminal type	Receptacles
Mating tab width	6.3
Crimping press	On request

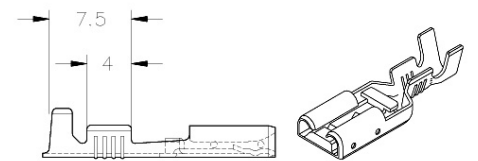

Partnumber	Wire size	AWG	Tab thickn.	Material	Mat. thickn.	Parts x reel	Ø Insul.	Approvals
32473200	1 to 2.5	18-14	0.8	Brass	0.4	7000	3 to 4.3	UL
32473032	0.5 to 1	20-18	0.8	Bronze Sn	0.4	8000	1.8 to 2.5	UL
32473432	2.5 to 5	14-10	0.8	Bronze Sn	0.4	6000	3.6 to 5	UL
32473232	1 to 2.5	18-14	0.8	Bronze Sn	0.4	7000	3 to 4.3	UL
32473002	0.5 to 1	20-18	0.8	Brass Sn	0.4	8000	1.8 to 2.5	UL
32473202	1 to 2.5	18-14	0.8	Brass Sn	0.4	7000	3 to 4.3	UL
32473424	2.5 to 5	14-10	0.8	Steel Ni	0.4	6000	3.6 to 5	UL
32473230	1 to 2.5	18-14	0.8	Bronze	0.4	7000	3 to 4.3	UL

Partnumber	Wire size	AWG	Tab thickn.	Material	Mat. thickn.	Parts x reel	Ø Insul.	Approvals
32473024	0.5 to 1	20-18	0.8	Steel Ni	0.4	8000	1.8 to 2.5	UL
32473430	2.5 to 5	14-10	0.8	Bronze	0.4	6000	3.6 to 5	UL
32473000	0.5 to 1	20-18	0.8	Brass	0.4	8000	1.8 to 2.5	UL
32473402	2.5 to 5	14-10	0.8	Brass Sn	0.4	6000	3.6 to 5	UL
32473400	2.5 to 5	14-10	0.8	Brass	0.4	6000	3.6 to 5	UL
32473224	1 to 2.5	18-14	0.8	Steel Ni	0.4	7000	3 to 4.3	UL
32473030	0.5 to 1	20-18	0.8	Bronze	0.4	8000	1.8 to 2.5	UL

AVT Industrial Components BV, Givatec BVBA and AGCO BV are part of AVT Wiring & Connecting

AVT Industrial Components BV

+31 (0)40 20 88 088  
sales@avtic.com  
www.avtic.com

Givatec BVBA

+32 (0)16 400 500  
sales@givatec.com  
www.givatec.com

AGCO BV

+31 (0)40 208 80 044  
sales@agco.nl  
www.agco.nl

