



UL 3173/CSA cross-linked polymer insulated single wires, halogen-free

UNITEC 125°C (UL STYLE 3173)

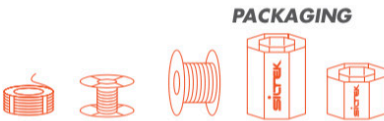

STANDARDS



1- Flexible copper
2- Halogen free cross-linked tecnopolymer

CHARACTERISTICS

Working temperature: **-50 +125 °C**
Working voltage: **600 V**
Test voltage: **2000 V**

CONDUCTOR

Available in tin plated copper

APPLICATIONS



Section AWG	Stranding mm	Conductor Diameter mm	Thickness mm	Outer Diameter mm	Copper Weight Kg/Km	Cable Weight Kg/Km
24	7x0,20	0,6	0,75	2,1	2	5,9
22	11x0,20	0,8	0,75	2,3	3,1	7,7
20	16x0,20	0,9	0,75	2,4	5	9,8
18	26x0,20	1,2	0,75	2,7	7,9	13,8
16	42x0,20	1,4	0,75	2,9	12,6	18,9
14	42x0,25	1,8	0,75	3,3	20	27,7
12	67x0,25	2,2	0,75	3,7	31,8	40,7
10	74x0,30	3,2	0,75	4,7	50,5	65
8	112x0,30	3,9	1,15	6,2	80,3	106,4
6	106x0,40	4,9	1,5	7,9	127,7	170,5
4	168x0,40	6,4	1,5	9,4	203	260,9
2	267x0,40	8,1	1,5	11,1	322,8	398,5
1	337x0,40	9,2	2	13,2	407,1	520,4
1/0	425x0,40	10,4	2	14,4	513,5	644,6
2/0	536x0,40	11,6	2	15,6	647,3	795,7
3/0	676x0,40	13,3	2	17,3	816,1	996
4/0	853x0,40	15	2	19	1029,10	1240,50