

Klikseal Metric Grommets



Material

TPE and Polyamide 66
UL approved material
Integrated cable anchorage,
wide sealing range.
Material thickness 1,5 - 5 mm
Quick and simple assembly with-
out the use of tools.

Mode of protection

IP67

Temperature range

-20°C...+125°C

Test standard

EN60529:1991+A1


EN50262:1998

EMKO-TUI (03-SEC) FI001/84

606620

Semko report

Halogen-Free

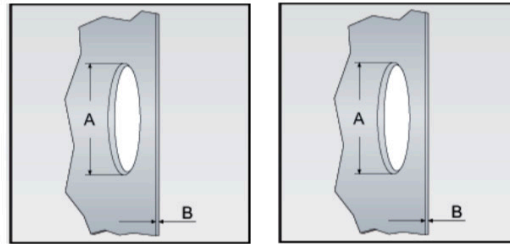

Purchase number	Size	Anchorage type A* for Cable Ø mm	For cable / pipe Ø mm	A mm	B mm	B for IP67/65 mm	H mm	H2 mm	D1 mm	D*** mm	Pcs pack
Light grey RAL 7035											
14425803	M20	7 - 11	4 - 11	20,5	1,5 - 5	2 - 5	17 - 20	5,7	4,0	29,3 - 34,5	50
14425804	M25	7 - 13**	4 - 14	25,5	1,5 - 5	2 - 5	17 - 20	5,7	5,0	34,3 - 40,0	50
14425805	M32	NA	11 - 20	32,5	1,5 - 5	NA	14 - 18	5,3	5,5	41,7 - 47,5	25
Black RAL 9005											
14425813	M20	7 - 11	4 - 11	20,5	1,5 - 5	2 - 5	17 - 20	5,7	4,0	29,3 - 34,5	50
14425814	M25	7 - 13**	4 - 14	25,5	1,5 - 5	2 - 5	17 - 20	5,7	5,0	34,3 - 40,0	50
14425815	M32	NA	11 - 20	32,5	1,5 - 5	NA	14 - 18	5,3	5,5	41,7 - 47,5	25
White RAL 9010											
14425823	M20	7 - 11	4 - 11	20,5	1,5 - 5	2 - 5	17 - 20	5,7	4,0	29,3 - 34,5	50
14425824	M25	7 - 13**	4 - 14	25,5	1,5 - 5	2 - 5	17 - 20	5,7	5,0	34,3 - 40,0	50
14425825	M32	NA	11 - 20	32,5	1,5 - 5	NA	14 - 18	5,3	5,5	41,7 - 47,5	25
Other colours											
On request	M20	7 - 11	4 - 11	20,5	1,5 - 5	2 - 5	17 - 20	5,7	4,0	29,3 - 34,5	50
On request	M25	7 - 13**	4 - 14	25,5	1,5 - 5	2 - 5	17 - 20	5,7	5,0	34,3 - 40,0	50
On request	M32	NA	11 - 20	32,5	1,5 - 5	NA	14 - 18	5,3	5,5	41,7 - 47,5	25

NA - Not available at time of printing

* Cable Anchorage Type A, according to EN 50262.

** 8,1 - 8,9 mm only approved for tension relief.

*** Varies depending on the thickness of material installed in.