

Cable trunking

GN-HF-S

Cable trunking SES plain and with base punching




GN-HF-S





GN-HF-S

Material: PC/ABS, halogen free
Colour: light grey RAL7035
Operating temperatures: -25 to +90°C
Volume resistivity: 10¹⁸ Ω.cm
Dielectric strength: 35 kV/mm
Specification: V0 UL94
NF F 16-101/102 : I3/F2
DIN 5510-2 : S4-SR2-ST2
EN 45545-2 : R22 HL3, R23 HL3
Standard length: 2 meters
Double sided adhesive tape: on request
Minimum quantity: 1 complete pack (incl. lids)

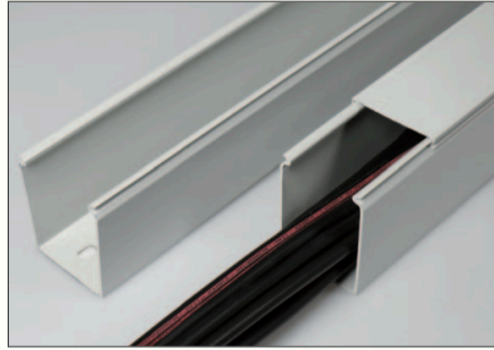

type	trunking artide number	m	ext. dimensions		quant. of cables per trunking (filling 50%)			lids (alone)	
			H mm	W mm	1 mm ²	1,5 mm ²	2,5 mm ²	art. no.	m
GN-HF-S 30 x 30	0850 0033 025	48	30	30	48	39	33	0850 0505 025	24
GN-HF-S 40 x 40	0850 0042 025	32	40	40	94	77	64	0850 0510 025	24
GN-HF-S 40 x 60	0850 0043 025	24	40	60	149	122	102	0850 0510 025	24
GN-HF-S 60 x 40	0850 0052 025	32	60	40	144	118	99	0850 0520 025	24
GN-HF-S 80 x 40	0850 0062 025	24	80	40	193	159	133	0850 0520 025	24

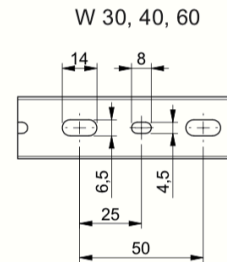

Base punching to
NF EN 50085