

Cable trunking

GF-DIN-A7/5

Cable trunking SES with slots and base punching



GF-DIN-A7/5



GF-DIN-A7/5


Material: Rigid PVC quality 9051 LF
Colours: grey RAL7030 - black
Operating temperatures: -5 to +65°C
Volume resistivity: 10¹⁵ Ω.cm
Dielectric strength: 15kV/mm
Spécification: V0 UL94
Standard length: 2 meters
Double sided adhesive: upon request
Minimum delivery: 1 complete packing (with lids)




Example for order:

Colours: 013 010

code group	detail article	code colour
0845	X X X X	X X X



type	trunking art. no.	m	outside dim.		cables per trunking (filling 50%)			lids (alone) art. no.		
			H mm	W mm	1 mm ²	1,5 mm ²	2,5 mm ²	art. no.	m	
GF-DIN-A7/5	25 x 25	0845 0031 ***	48	23	23	25	21	17	0845 0640 ***	48
GF-DIN-A7/5	37,5x 25	0845 0041 ***	48	35,5	23	44	36	30	0845 0640 ***	48
GF-DIN-A7/5	37,5x 37,5	0845 0051 ***	24	35,5	35,5	74	61	51	0845 0645 ***	24
GF-DIN-A7/5	37,5x 50	0845 0061 ***	24	35,5	48	105	86	72	0845 0650 ***	24
GF-DIN-A7/5	50 x 25	0845 0131 ***	48	48	23	62	51	42	0845 0640 ***	48
GF-DIN-A7/5	50 x 37,5	0845 0141 ***	24	48	35,5	104	85	71	0845 0645 ***	24
GF-DIN-A7/5	50 x 50	0845 0151 ***	24	48	48	146	120	100	0845 0650 ***	24
GF-DIN-A7/5	50 x 75	0845 0152 ***	24	48	73	230	189	158	0845 0655 ***	24
GF-DIN-A7/5	50 x 100	0845 0153 ***	12	48	98	315	259	216	0845 0630 ***	12
GF-DIN-A7/5	50 x 125	0845 0154 ***	12	48	123	399	328	274	0845 0665 ***	12
GF-DIN-A7/5	75 x 25	0845 0211 ***	48	73	25	101	83	69	0845 0640 ***	48
GF-DIN-A7/5	75 x 37,5	0845 0221 ***	24	73	35,5	161	132	111	0845 0645 ***	24
GF-DIN-A7/5	75 x 50	0845 0231 ***	24	73	48	227	186	156	0845 0650 ***	24
GF-DIN-A7/5	75 x 75	0845 0241 ***	24	73	73	358	294	246	0845 0655 ***	24
GF-DIN-A7/5	75 x 100	0845 0251 ***	12	73	98	489	402	336	0845 0630 ***	12
GF-DIN-A7/5	75 x 125	0845 0261 ***	12	73	123	620	509	426	0845 0665 ***	12
GF-DIN-A7/5	100 x 50	0845 0286 ***	24	100	48	304	250	209	0845 0650 ***	24
GF-DIN-A7/5	100 x 75	0845 0296 ***	12	100	73	484	398	333	0845 0655 ***	24
GF-DIN-A7/5	100 x 100	0845 0268 ***	12	100	98	671	551	461	0845 0630 ***	12
GF-DIN-A7/5	100 x 150	0845 0269 ***	12	100	150	1043	856	716	0845 0637 ***	12

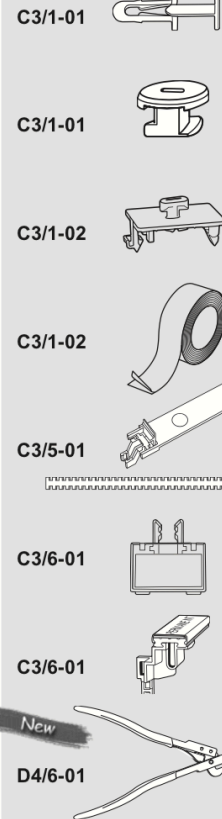

Cable trunking

GF-DIN-A7/5

Cable trunking SES with slots and base punching

GF-DIN-A7/5

GF-DIN-A7/5

H = 25 mm

W = 25, 37,5 and 50 mm

**H = 37,5 mm
H = 50 mm**

W = 75, 100, 125 and 150 mm

H = 75 mm

Break out webs

Break out sides

H = 100 mm

Base punching to NF EN 50085

H (mm)	25	37,5	50	75	100
h1 (mm)	5	7	9	11	20

AVT Industrial Components BV, Givatec BVBA and AGCO BV are part of AVT Wiring & Connecting

AVT Industrial Components BV
+31 (0)40 20 88 088
sales@avtic.com
www.avtic.com

Givatec BVBA
+32 (0)16 400 500
sales@givatec.com
www.givatec.com

AGCO BV
+31 (0)40 208 80 044
sales@agco.nl
www.agco.nl