
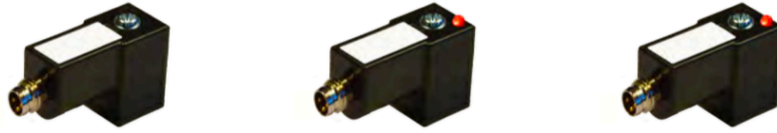
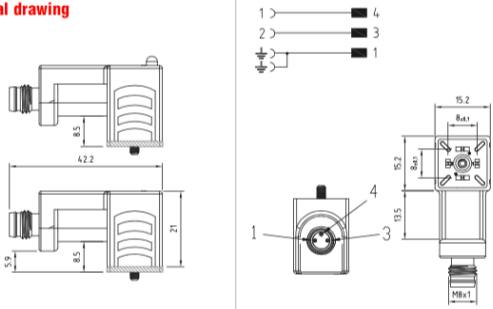



Valve Connectors

Adapters DIN Valve connectors - Form C - EN175301-803(DIN43650) + M12/M8 connectors



Technical drawing								
Product description								
Connector type	Adapter DIN valve connector-M8 connector		Adapter DIN valve connector-M8 connector		Adapter DIN valve connector-M8 connector		Adapter DIN valve connector-M8 connector	
Conforms to	EN175301-803		EN175301-803		EN175301-803		EN175301-803	
Construction type	C		C		C		C	
Technical data								
Description	Adapter square connector EN175301-803 (form C) - M8 circular connector.		Adapter square connector EN175301-803 (form C) - M8 circular connector.		Adapter square connector EN175301-803 (form C) - M8 circular connector.		Adapter square connector EN175301-803 (form C) - M8 circular connector.	
Contacts spacing	8mm		8mm		8mm		8mm	
Number of contacts	2poles + 2P.E.		2poles + 2P.E.		2poles + 2P.E.		2poles + 2P.E.	
Earth positioning	H.6-12		H.6-12		H.6-12		H.6-12	
Housing colour	Black		Black		Black		Black	
Housing height	21mm		21mm		21mm		21mm	
Gasket type	Integrated NBR gasket		Integrated NBR gasket		Integrated NBR gasket		Integrated NBR gasket	
Circular connector type	M8		M8		M8		M8	
Rated voltage	60V AC/DC		24V DC		24V AC/DC		24V AC/DC	
Circuit type	-		Led + Diode(1A)		Bipolar Led + Varistor		Bipolar Led + Varistor	
Led colour	-		Red		Red		Red	
Central fixing screw	M2.5 L=21.5mm		M2.5 L=21.5mm		M2.5 L=21.5mm		M2.5 L=21.5mm	
Central fixing screw material	Iron+Zinc plated		Iron+Zinc plated		Iron+Zinc plated		Iron+Zinc plated	
Central screw torque	0.5 N*m		0.5 N*m		0.5 N*m		0.5 N*m	
M8 Connector type	Straight 180°		Straight 180°		Straight 180°		Straight 180°	
M8 contacts type	Male 3poles		Male 3poles		Male 3poles		Male 3poles	
Number of contacts connected	n°3		n°3		n°3		n°3	
Packaging								
Qty/Bag	1pc / bag		1pc / bag		1pc / bag		1pc / bag	
Other accessories options								
See accessories section								